

Description:

XFK-3 Automatic carton sealing strapping packaging line can automatically complete the processes of flapping & bottom sealing, flapping & carton sealing, conveying, turning the package by 90°, "#" shape strapping or multi-passes strapping.

Features:

1. Human-machine interface, superior PLC, LOGO control.
2. Digital manipulation to ensure easy parameter adjustment and steady operation.
3. Easy size changeover through manual adjustment.
4. With functions of auto stop, auto wakeup and multi-protection.
5. With flexible configurations which can be selected according to needs.


Application:

XFK-3 Automatic carton sealing strapping packaging line is suitable for circumstance where size of carton is not changed frequently to complete the processes of up & down sealing and # type strapping.

Configuration:

DZF-5050 Semiautomatic Flap Carton Sealer	1set
SJG-100/66 No-drive Roller Conveyor	2sets (2×1m)
FXJ-5050Z Auto Flap Carton Sealer	1set
SJGL-80/66 Chain Drive Roller Conveyor	2sets (2×0.8m)
KZW-8060 High-table Automatic Strapping Machine	2sets
SJZGL-140/66 Vertical Turning Chain Drive Roller Conveyor	1set
Electric Cabinet	1set

Workflow:

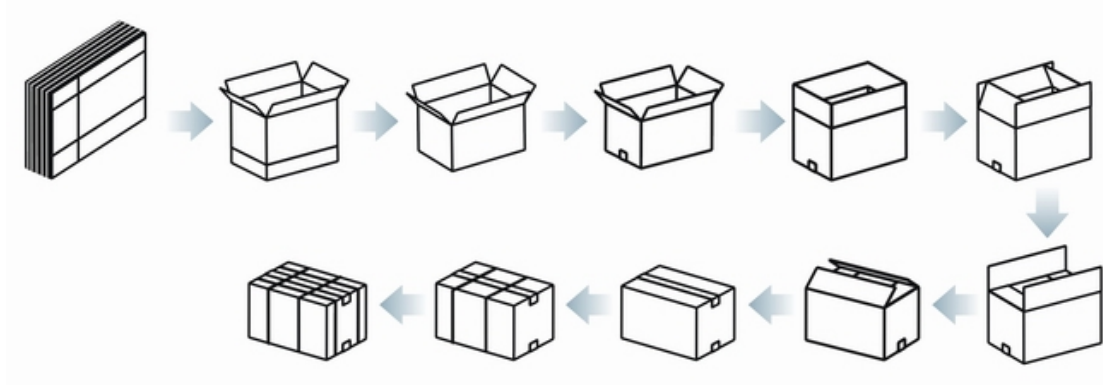

Parameters:

	XFK-3
Voltage (V/Hz)	AC 220/50 110/60
Gross Power (W)	4100
Max. Carton Size (L×W×H) (mm)	500×400×450
Min. Carton Size (L×W×H) (mm)	180×260×130
Speed (m/min)	16
Productive Capacity (pcs/h)	600
Height of Table (mm)	830
Adhesive Tape (mm)	BOPP、PVC Adhesive tape, width 60、76mm
Available Strapping Belt (mm)	plastic strapping belt, width9~15 thickness0.5~1.1
Air Compressor (optional)	2/3 litres at 5 bars
External Dimensions (L×W×H) (mm)	“L” Type 7850×3500×1700
Net Weight (kg)	950